


Datasheet Actuator: *Curve® plugged A1940E24*




- Active length: **19 mm**
- Module size: **39 mm x 40 mm x 3.3 mm**
- Bending: **low (E24)**
- Weight: **7.3 g + hosting structure**
- Hosting structure: **steel + rivets, tip 25 mm
size 74 x 40 x 0.50 mm³**
- Load range with high cycling stability (> 300.000)
 - at module edge: **2760 g**
 - at 25 mm:** **1480 g**
 - at 50 mm: **1010 g**

**Actuator
A1940E24**

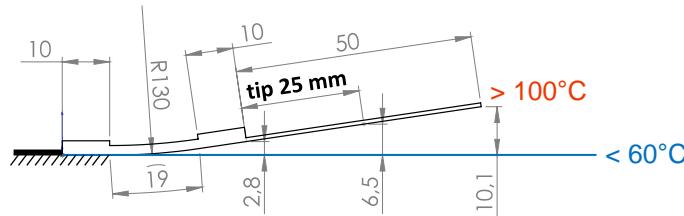

M1940E24 – Actuator Module only

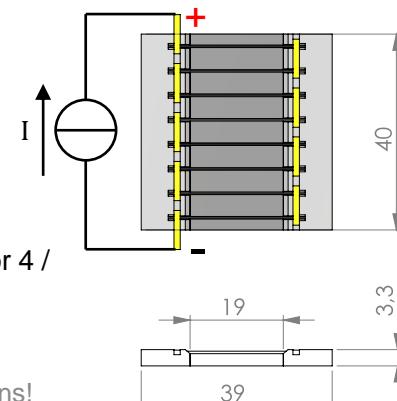

- Operating mode: **plugged**
- Thermal activation by: resistive heating
- Electronic circuit: all wires in series
- Resistivity: 0.8 Ohm
- Full Activation (DC): e.g. 3 A for 15 s / 4 A for 4 / 5 A for 1.3 s

© CompActive GmbH



All values are only estimations!

Customized, high-performance actuators by ...




... high-tech solutions

- reliable load transfer
- proven cycle stability
- injection molded frame elements
- special SMA material specifications
- high temperature FRP
- self-sensing capability

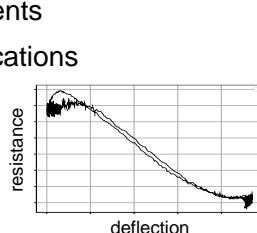


... individual design

- substrate (metals, polymers)
- size
- deflection
- load / cycles
- wire material / temperatures
- electrical resistance

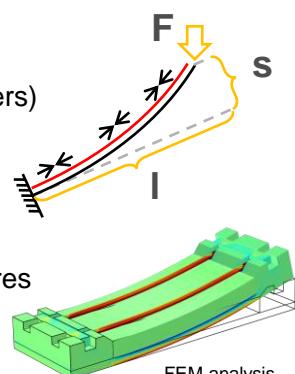

... customized mechanical fixation

- adhesive films
- liquid adhesives
- bolts, rivets, screws
- plug-on

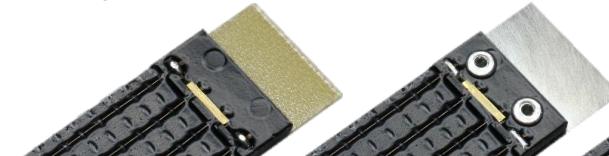

... various electrical connection

- crimping
- soldering
- plugging in
- welding



© CompActive GmbH